





why! Replacing N240JU keyboard

Written By: Felice Suglia





Step 1 — accumulator

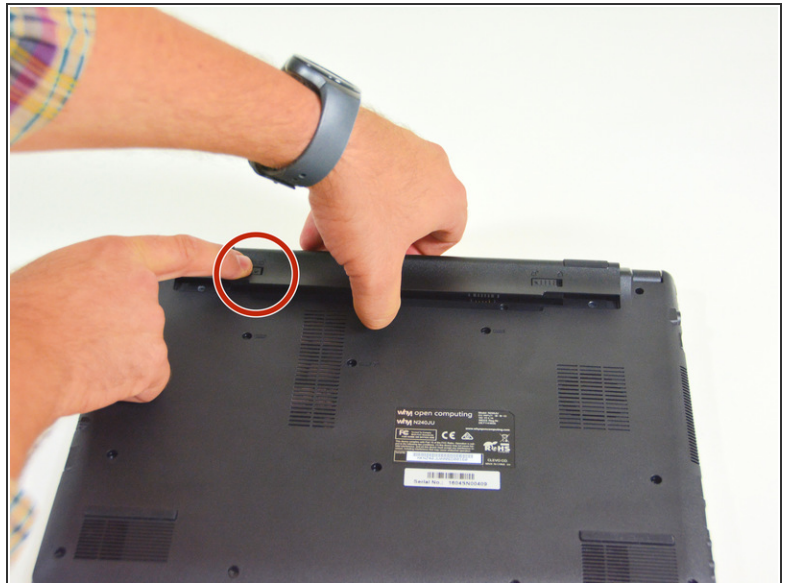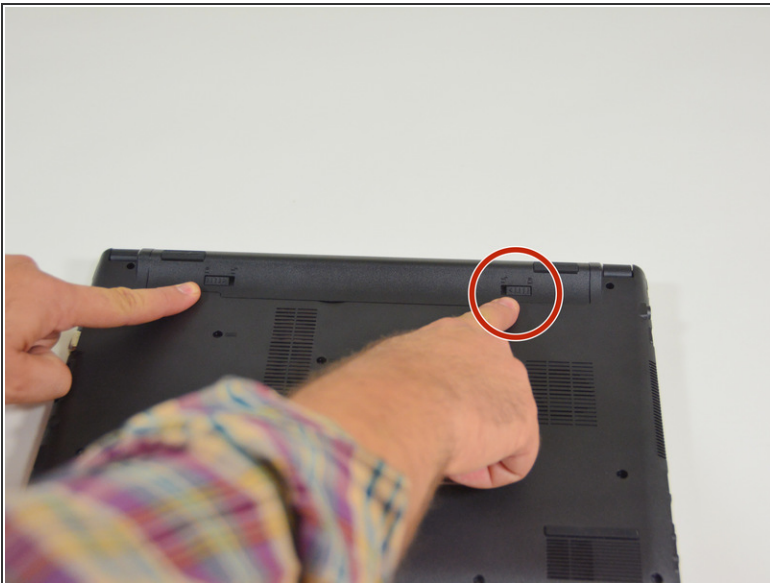


- First open the latch on the left side.
- Then remove the accumulator with simultaneously open latch on the left side.

Step 2 — Access to major components

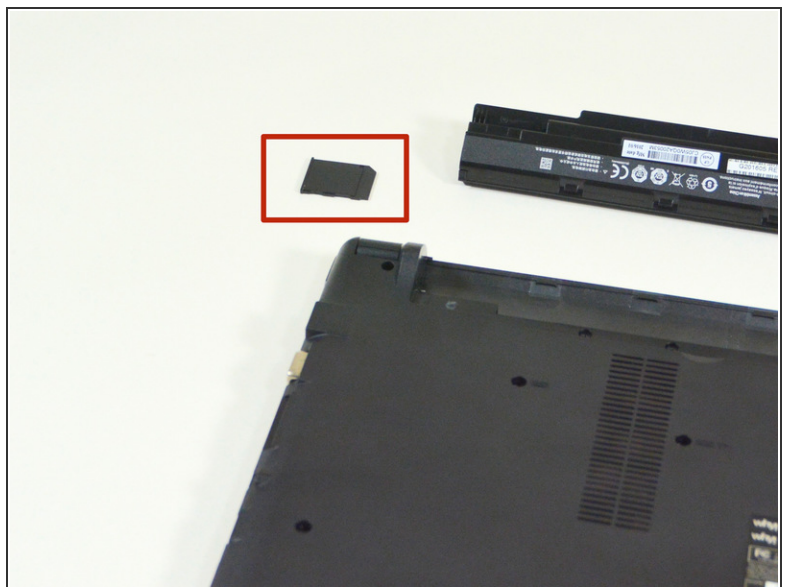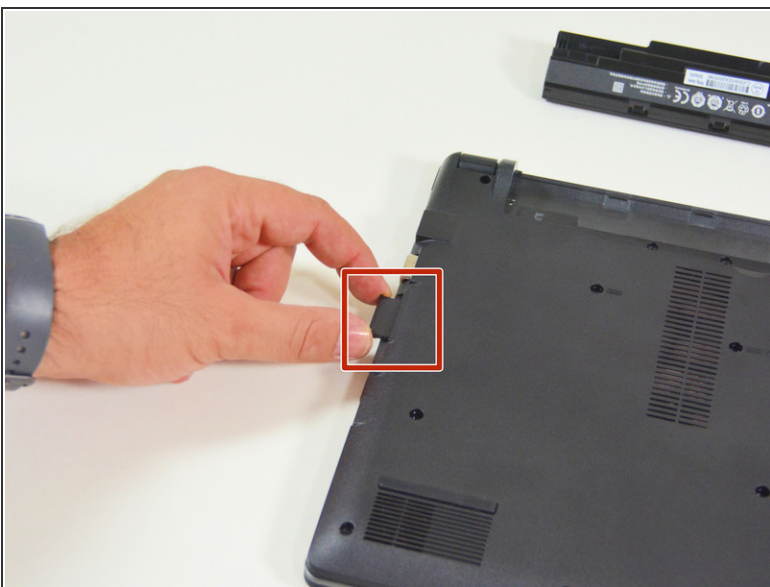


- Places first imitated memory card.
- Then remove this counterfeit card and put it down on your desk.

Step 3

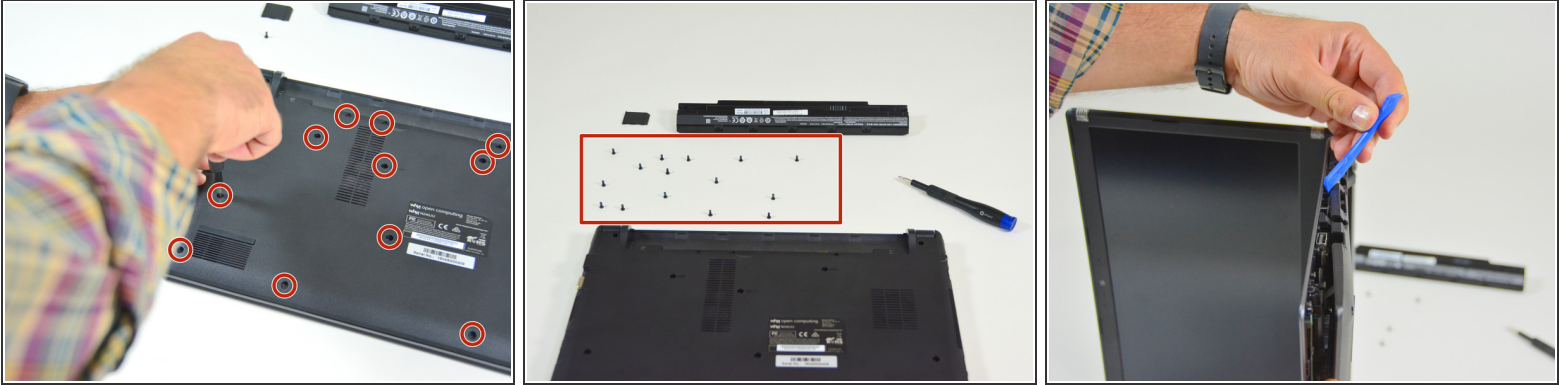


- Places you are holding the 15 screws the bottom cover of the computer.
- And then loosen these screws and put them onto your workplace.
- Loosen danacch the fortifications of the lower cover as shown in this step Figure 3.

Step 4 — keyboard

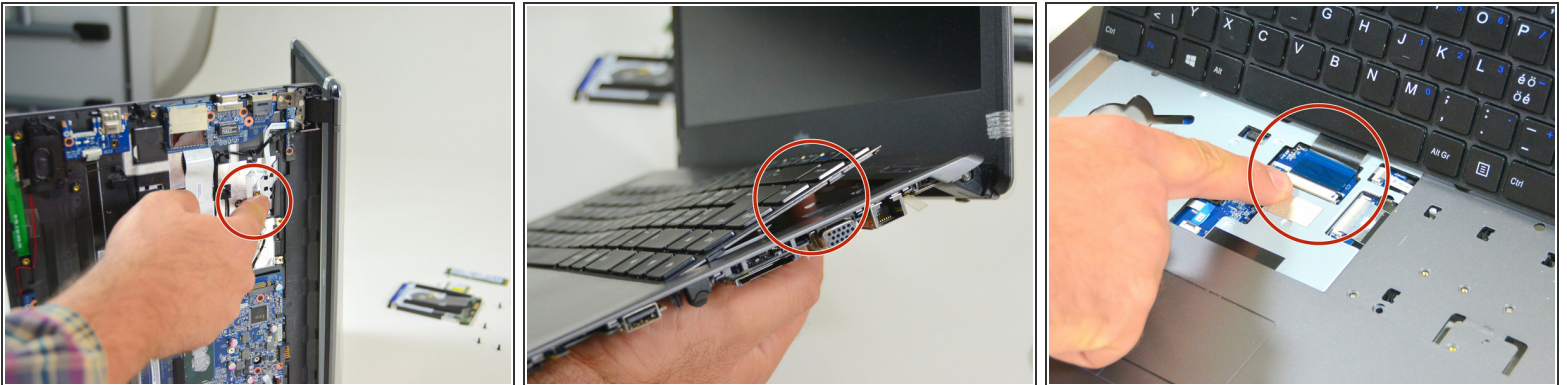

- Once the bottom cover is removed, pressing his forefinger to this Scrittes marked in Figure 1 point.
- The keyboard then moves away from its mounting location. Attention however bleit connected to a connecting cable to the enclosure.
- Places then the connector.

Step 5

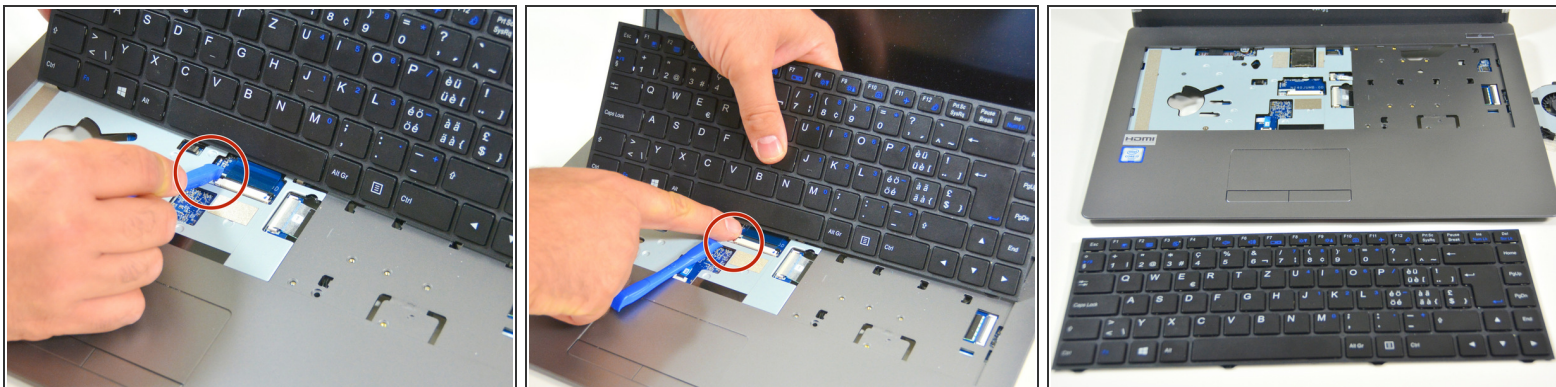

- Places then the left fixation of the connector and unlock it.
- Unlock also the right fixation of the connector.
- Finally, loosen the connecting cable and lift the keyboard out of its mounting location.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

This document was last generated on 2017-06-24 07:01:02 PM.